


Filtro recto (FM1)




TIPO DE ACERO:	304/ 316L
EMPAQUE:	SILICÓN
TEMPERATURA DE TRABAJO:	-20°C +120°C
PRESIÓN DE TRABAJO:	0 – 8 bar
TIPO DE CONEXIÓN:	Clamp.
RUGOSIDAD:	Superficie interna: Ra ≤0.8 µm Superficie externa: Mate

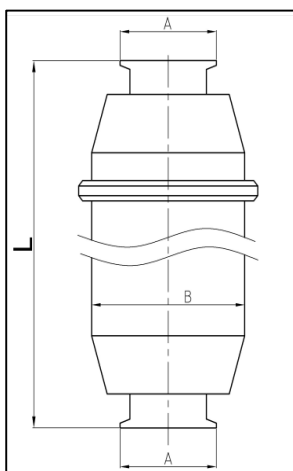

DIMENSIONES (mm)			
SIZE	A	B	L
1"	50.4	101.6	400
1 ½"	50.4	101.6	400
2"	63.9	101.6	400
2 ½"	77.4	101.6	400
3"	90.9	114.3	400
4"	118.9	114.3	400

DIMENSIONES MALLA		
MESH	B(mm)	Superficie Útil (%)
30	0.55	48
40	0.40	46
60	0.30	52.6
80	0.20	42
100	0.15	36.2
165	0.10	45.4



DIMENSIONES CEDAZO	
A(mm)	Superficie Útil (%)
0.5	15
1	28
1.5	33
2	30
3	33
5	46

