


## TAPÓN CLAMP 16AMP



TIPO DE ACERO:	T-304 / T-316L
CONEXIÓN:	Clamp.

### COMPOSICIÓN QUÍMICA (%)


304	(C)	(SI)	(MN)	(P)	(S)	(Cr)	(Ni)	(Mo)
	0.08	1.00	2.00	0.045	0.03	18-20	8-11	-

### COMPOSICIÓN QUÍMICA (%)

316	(C)	(SI)	(MN)	(P)	(S)	(Cr)	(Ni)	(Mo)
	0.035	1.00	2.00	0.045	0.03	16-18	10-14	2-3

### PROPIEDADES MECÁNICAS

Elongation(%)	Tensile Strength (Mpa)	Yield Strength (Mpa)	Hardness (HB)
Min. 35	Min. 485	Min. 170	Máx. 90

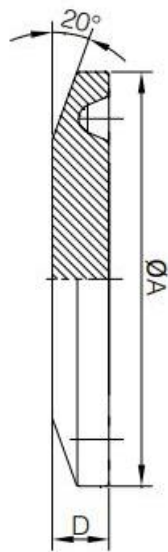

### DIMENSIONES (mm)

SIZE	A	D
1"	25.2	5.0
1 ½"	50.5	6.3
2"	64.0	6.3
2 ½"	77.5	6.3
3"	91.0	6.3
4"	119.0	7.9
6"	166.8	11.1
8"	217.7	11.1
10"	268.5	11.1
12"	319.5	11.1